

Placing the sensor

CL-P521,621,631

CL-S521,621,631

1. Open the printarm.

To place the sensors correctly you need to know where the sensors and media guide are.


Upper sensor (arrow)

Lower sensor (dot)

Media guide


 Place the upper sensor so it points directly at the dot on the lower sensor. The sensors must be placed according to the label you use.

Your sensors are now directly on top of each other like in the picture to the right.

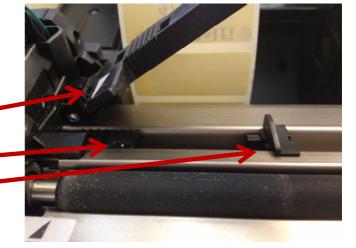



 Now push the media guide to the left, pushing the two sensors along with it, for about 0.5 cm.



4. Now you can move the Media guide back into position and setup the printer. Make a print of one of your label layouts to test that everything works as expected.

Document description

Page 1 of 1

This document contains confidential information. Any unauthorized copying, disclosure or distribution of the information in this document is strictly forbidden. Copyright © 2012 Delfi Technologies A/S.